


How to complete the wiring

How to complete the wiring




Installation

- * If the power is on, the click noise generated by the connection may damage the speakers.
2. Cut out the mounting template from the packing box.
3. Paste the template on the location selected for mounting the speaker.
4. Mark the cut-off hole and the 4 bolt holes.
5. Cut out the marked area and drill the bolt holes.
6. Mount on the speaker as shown below.

67

after

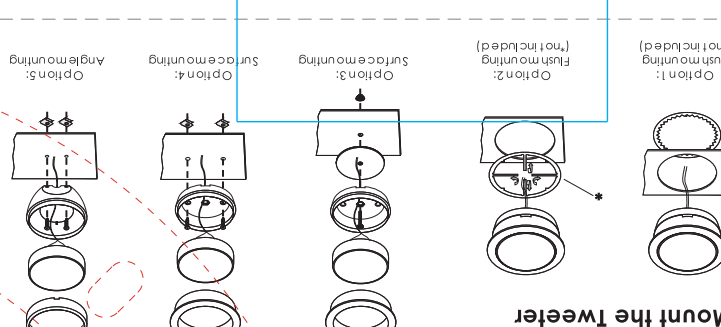

What's in the box

- ① Speaker (x2pcs)
 - ② Frame (x2pcs)
 - ③ Crossover (x2pcs)
 - ④ Tweeter (with wire) (x2pcs)
 - ⑤ D4x25mm screw (x12pcs)
 - ⑥ Strapnet (x12pcs)
 - ⑦ Angle adapter (x2pcs)
- * Design and specifications are subject to change without notice.

Specifications


- | | |
|---------------------------|------------------|
| Speaker type: | 5" (130mm) 2-way |
| Mounting depth (woofer): | >1.69" (43mm) |
| Mounting depth (tweeter): | >0.8" (19.5mm) |
| N-Power: | 30 watts |
| Peak power: | 300 watts |
| Sensitivity(dB/W/m): | 87.3 dB |
| Frequency response: | 100Hz-20K Hz |
| Impedance: | 4 ohms |
| Voice coil: | ASV 20.4mm |
| Magnet mass: | 6.35Z (180g) |
| Net mass (1 set): | Approx. 1.1 Kg |

* Design and specifications are subject to change without notice.



Nakamichi

NSF-C51357

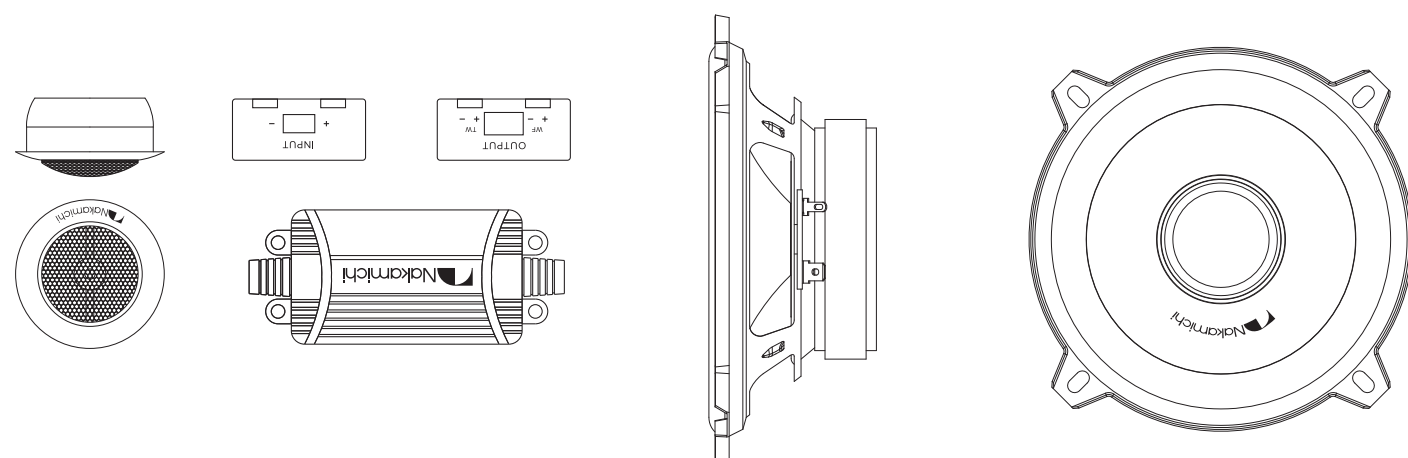

 nakamichicaraudio.com

NSE SERIES

**5" 2-WAY COMPONENT SPEAKER
N-POWER 30W**

PEAK POWER: **300W**

NSE-CS1357




Since
1948



SCAN OUR QR CODE OR VISIT WWW.NAKAMICHICARAUDIO.COM
FOR COMPLETE AUDIO SETTINGS INSTRUCTIONS

 [nakamichi.global](https://www.facebook.com/nakamichi.global) [nakamichi.caraudio](https://www.instagram.com/nakamichi.caraudio)

Made in China | 中國製造



Model No.: NSE-CS1357



G.W.: Approx. 1.4 kg

Box Dimensions: 390(W) x 183(D) x 85(H) mm

S/No.:

日期	更改内容	签名
21.07.07	1. 彩盒增加二维码, 增加结构图上部分尺寸标注, 删掉logo小R,	靖