

注：红色线为安装模板，要求轧虚线孔。
尺寸：外圈Ø182mm，内圈Ø148mm，孔位Ø156mm，4-Ø3mm。

Design and specifications are subject to change without notice.

What's in the box:
 ① Speaker x 2pcs
 ② Grille net x Frame x 2pcs
 ③ Screw (4 x 25mm) x 8pcs
 ④ Gasket x 8pcs


How to complete the wiring:
 Consult the diagram below. Be sure to connect corresponding terminals, i.e. "+" to "+", "-" to "-". Connection with reversed polarity will degrade the quality of production.
 CAUTION: Connect the provided speaker cord to the speaker terminal while holding the lower portion of the speaker terminal.

Dimensions (Unit: mm)

Specifications:
 Speaker type: 6.5" (16.6cm)
 Mounting depth: >2.7" (67mm)
 N-power: 50 watts
 Sensitivity (88W/m): 90±3dB

Installation:
 1. Turn off the car ignition key.
 - If the power is on, the click noise generated by the connection may damage the speakers.
 2. Cut out the mounting template from the packing box.
 3. Paste the mounting template on the location selected for mounting the speaker.
 4. Mark the cutting line and the 4 bolt holes.
 5. Cut out the marked area and drill the bolt holes.
 6. Mount on the speaker as shown below.
 Fig. 1: Mount on door (front or rear)
 Fig. 2: Mount on rear tray

Net mass (1 pair): Approx. 2.1 kg
Magnet mass: 15.4 Oz (437g)
Voice coil: KSV 25.5mm
Impedance: 4 ohms
Frequency response: 113-13k Hz

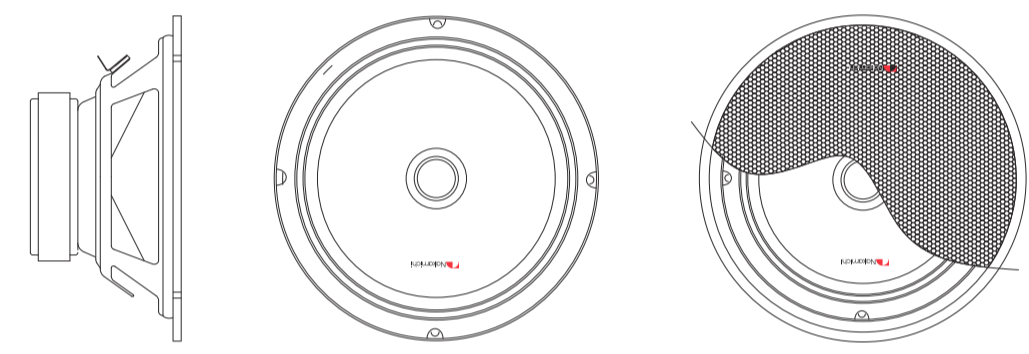

6.5" MID-RANGE SPEAKER, N-POWER 50W
NSM-6517

nakamichicarudio.com



nakamichicarudio.com

NSM SERIES

6.5" MID-RANGE SPEAKER
N-POWER 50W

PEAK POWER: **500W**

NSM-6517



Since **1948**
JAPANESE INNOVATION



nakamichicarudio.com

NSM SERIES



Model No.: NSM-6517
 G.W.: Approx. 2.4 kg (5.3 lb) (1 pair)
 Box Dimensions: 414(W) x 212(D) x 108(H) mm
 S/No.:

彩盒尺寸：414x211x108mm
 材质：350G裱140g+180g纸。 ， 过哑胶