

N-T286

User Manual



TWEETER SYSTEM




CONNECT WITH US ONLINE TO EXPLORE NAKAMICHI'S COMPLETE RANGE, INSTRUCTIONS & SOFTWARE DOWNLOADS AND WARRANTY REGISTRATION.

WWW.NAKAMICHICARAUDIO.COM

Facebook: [nakamichi.global](https://www.facebook.com/nakamichi.global) Instagram: [nakamichi.caraudio](https://www.instagram.com/nakamichi.caraudio)

SPECIFICATIONS

model	N-T286
N-Power	15W
Peak Power	100W
Nominal Impedance	3.6Ω
Sensitivity@1w/1m	89dB
Frequency Range	1200Hz ~ 20KHz
Voice Coil	ASV 28mm
Magnet Mass	0.3 Oz
Mounting Depth	15mm
Net Mass (1pr)	215g

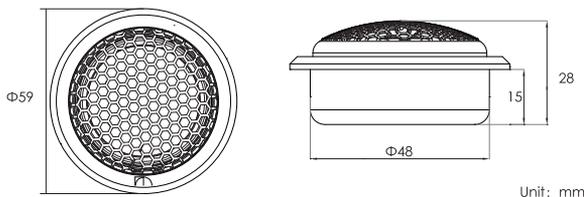

WHAT'S IN THE BOX

Check and identify the contents of your package:

1. Installation Manual (x1);
2. Tweeter (x2);

YOUR SPEAKER

Dear Customer,

Congratulations on purchasing our Nakamichi mobile system product for your sound system.

This product has been designed and manufactured to Nakamichi's exacting standards to ensure many years of audio enjoyment. For the best performance, we recommend that you have your Nakamichi product installed by an authorized Nakamichi dealer.

If you would like to install this product on your own, we recommend for you to go through this manual to familiarize yourself with all the installation requirements and procedures.

If you encounter any issues or if you have any questions on the operation of this product, please contact your nearest authorized Nakamichi dealer for assistance, or you may also contact us through our website or social media channels.

Installation of Your Product

In today's modern vehicles, it is very easy to cause damage to existing systems through improper installation. Please follow and scrutinize all wiring diagrams to ensure that you have connected everything in its proper place.

If you find yourself uncomfortable or unfamiliar with understanding the wiring and installation diagrams or testing instructions, do contact your nearest Nakamichi dealer to perform the installation for you.


Safety Warnings and Considerations

- Clean only with a dry cloth or other similar materials.
- Install your product in a dry, well-ventilated location that does not interfere with your vehicle's safety equipment.
- Do not block any ventilation openings when installing this product.
- Do not mount the product in the engine compartment of your vehicle or in any areas of extreme heat such as mufflers, silencers, exhaust pipes or other heat producing apparatus.
- Securely mount the product so that it does not come loose in the event of a collision or as a result of repeated vibrations that might occur during normal operation.
- Installation of the apparatus must be done with great care to prevent damage to your vehicle's fuel lines, power, and other electrical wiring, hydraulic brake lines, and other systems. If possible, always visit your nearest Nakamichi dealer to perform the installation.
- Do not run any wiring outside or underneath the vehicle. Keep all wires inside the vehicle.
- Take the necessary precautions when making connections to the vehicle's battery to avoid any potential shock.
- Protect all system wires from sharp edges by carefully routing them, always use rubber grommets to protect wiring and cables whenever you are installing them through metal openings.
- Secure all wiring using cable ties or wire clamps to protect them from moving parts and sharp edges.
- This apparatus shall not be exposed to dripping or splashing, and no object filled with liquids, shall be placed on the apparatus.
- Refer all servicing to qualified service personnel. Servicing is required when the apparatus has been damaged in any way, such as the power input terminals are damaged, liquid has been spilled or objects have fallen into the apparatus, the apparatus has been exposed to rain or moisture, does not operate normally, or has been dropped.
- Fuses shall be replaced only with the correct type and fuse value, and only when the apparatus is powered off.
- Exposure to high sound pressure levels may lead to permanent hearing loss. Take every precaution to protect your hearing.

INSTALLATION

- Read and understand all instructions before you use the apparatus. If damage is caused by failure to follow instructions, the warranty does not apply.
- Use only the supplied mounting hardware for a safe and secure installation.
- Do not continuously use the speaker system beyond the peak power handling capacity.
- Keep credit cards, watches, recorded tapes etc. with magnetic coding away from the speaker system to prevent damage caused by the magnets in the speakers.
- Clean the apparatus with soft, damp cloth. Never use substances such as alcohol, chemicals or household cleaners on the apparatus.

1. Prepare a screwdriver, clean the installation location, and remove moisture, dust, and stains.
2. Install the speaker in a suitable position as shown in the diagram, and do not obstruct the driver's view.
3. Fix the speaker firmly and do not drop it.
4. Make sure to connect the corresponding terminals, that is, "+" to "+" and "-" to "-". Reverse polarity connection damages the speaker.

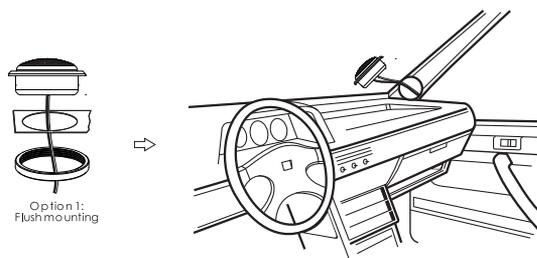

N-T286

使用說明書

您的產品

尊敬的客戶：

感謝您購買了適用於您的音響系統的Nakamichi移動系統產品。該產品的設計和製造符合Nakamichi的嚴格標準，可確保多年的音頻享受。為了獲得更佳性能，我們建議您由授權的Nakamichi經銷商安裝Nakamichi產品。如果您想自行安裝此產品，我們建議您通讀本手冊以熟悉所有安裝要求和過程。如果您遇到任何問題或對本產品的使用有任何疑問，請聯繫離您最近的Nakamichi授權經銷商以尋求幫助，或者您也可以通過我們的網站或社交媒體渠道與我們聯繫。

產品安裝

在當今的現代車輛中，很容易因安裝不當而損壞現有系統。請遵循並仔細檢查所有接線圖，以確保已正確連接所有部件。

如果您不熟悉接線和安裝，請與最近的Nakamichi經銷商聯繫以進行安裝。

安全警告和注意事項

- 僅用乾布或其他類似材料清潔。
- 將產品安裝在乾燥，通風良好的位置，不會干擾車輛的安全設備。
- 安裝本產品時，請勿阻塞任何通風口。
- 請勿將產品安裝在車輛的發動機艙內或任何過熱的地方，例如消聲器，消音器，排氣管或其他生熱設備。
- 牢固安裝產品，以免在碰撞或正常操作期間可能反復振動的情況下鬆動。
- 必須非常小心地安裝設備，以防止損壞車輛的燃油管路，電源和其他電線，液壓制動管路以及其他系統。如果可能，請始終與您最近的中道經銷商聯繫以進行安裝。
- 請勿在車輛外部或下方佈線。將所有電線保持在車內。
- 連接車輛電池時，請採取必要的預防措施，以免造成任何潛在的電擊。
- 小心佈線以保護所有系統電線免受尖銳邊緣的傷害，無論何時通過金屬開口安裝它們，請始終使用橡膠墊圈來保護電線和電纜。
- 使用電纜紮帶或線夾固定所有佈線，以防止其受到運動部件和尖銳邊緣的傷害。
- 請勿將本設備暴露在滴水或飛濺的液體上，也不要在其上放置裝有液體的物品。
- 將所有服務交給合格的服務人員。當設備以任何方式損壞時，例如電源輸入端子損壞，液體濺入或有物體掉入設備，設備被雨淋或受潮，無法正常工作。
- 保險絲只能用正確的類型和保險絲值更換，並且只能在設備斷電時更換。
- 暴露於高聲壓級可能會導致永久性聽力損失。採取一切預防措施來保護您的聽力。



TWEETER SYSTEM



CONNECT WITH US ONLINE TO EXPLORE NAKAMICHI'S COMPLETE RANGE, INSTRUCTIONS & SOFTWARE DOWNLOADS AND WARRANTY REGISTRATION.

WWW.NAKAMICHICARAUDIO.COM

Facebook: [nakamichi.global](https://www.facebook.com/nakamichi.global) Instagram: [nakamichi.caraudio](https://www.instagram.com/nakamichi.caraudio)


產品規格

型號	N-T286
額定功率	15W
最大功率	100W
阻抗(Ω)	3.6Ω
靈敏度@1w/1m	89dB
頻率響應	1200Hz ~ 20KHz
音圈規格	ASV 28mm
磁鐵質量	0.3 Oz
安裝深度	15mm
喇叭淨重 (1對)	215g

產品安裝

- 在使用設備前，請閱讀並理解所有說明。如果因未遵循說明而導致損壞，則保修不適用。
- 請勿連續使用超出峰值功率處理能力的揚聲器系統。
- 將帶有磁性編碼的信用卡、手表、錄音帶等遠離揚聲器系統，以防止揚聲器中的磁鐵造成損壞。
- 用柔軟的濕布清潔設備。切勿在設備上使用酒精、化學品或家用清潔劑等物質。

1. 準備一把螺絲刀，清潔安裝位置，去除濕氣、灰塵和污漬。
2. 按照圖示將揚聲器安裝在合適位置，不能妨礙駕駛員的視線。
3. 將揚聲器牢固固定，不能掉落。
4. 確保連接相應的端子，即“+”连接到“+”，“-”连接到“-”。反極性連接損壞揚聲器。

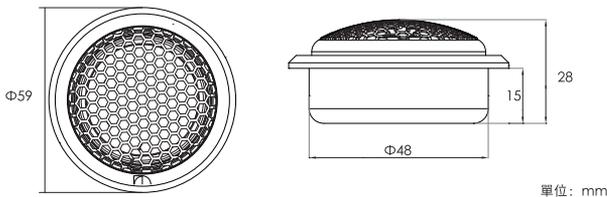


單位：mm

包裝內物品

檢查並識別包裝內的物品：

1. 使用說明書 1本
2. 高音揚聲器 2個



Option 1:
Flush mounting

