



# NSE-0818

### 3" 2-WAY COAXIAL SPEAKER

Speaker Type: 3" (88 mm)

Mounting Depth: >1.54" (39mm)

N-power: 25 watts

Peak Power: 75 watts

Sensitivity(Db/w/m): 88 ± 3dB

Frequency Response: 60Hz-20kHz

Impedance:  $2.5 \Omega$ 

Voice Coil:

Magnet: 5.18 OZ (147g) Neodymium

KSV Φ20.4 mm

Net Mass (1pr): Approx. 840a

#### IMPORTANT

- Thank you for purchasing the car Mid-Range speaker. For the secure installation and perfect operation of your Mid-Range speaker, please read the instructions carefully.
- · By planning your installation carefully you can avoid situations where the performance or reliability of your system is compromised.
- · We can not recommend specific locations for the Mid-Range speaker for each car, but we can give some general tips.
- Before connecting the Mid-Range speaker to the speakers, confirm that the power has been turned
  off. The click noise generated by the connection if the power is on may damage the Mid-Range
  speaker.

#### INSTALLATION

Install the speaker to the suitable location of your vehicle as illustrated below. It is recommended to have the Mid-Range speaker installed by a qualified technician.

Before installing the Mid-Range speaker to your vehicle:

Prepare a rag to clean the installation and remove moisture, dust and dirt.

- 1. Prepare a screw driver, clean the place to install, to remove humidity, dust and stains.
- 2. Join the supplied parts to the speaker as illustrated.
- 3. Use flat countersunk screws to attack the brackets.
- 4. Fix the speaker with binding screws firmly.



#### CAUTION

If the speaker is installed improperly, it may come off from the dashboard during driving, causing injury or accident.

#### HOW TO COMPLETE THE WIRING

- · Consult the diagram below. Be sure to connect corresponding terminals,
- i.e. "+" to "+" and "-" to "-".
- $\cdot$  Connection with reversed polarity will degrade the quality of production.
- · Route the speaker cord so that it does not obstruct safety drive.




#### WHAT'S IN THE BOX

Check to be sure you have the following items.

If any of the items below are missing, contact your dealer immediately.

1. Speaker x 2pcs 2. Screw (M6 x 16mm) x 4pcs

## DIMENSIONS (UNIT: MM)

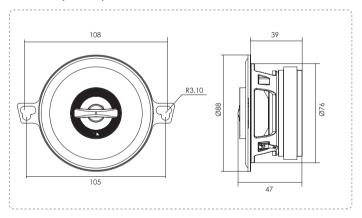



CONNECT WITH US ONLINE TO EXPLORE NAKAMICHI'S COMPLETE RANGE, INSTRUCTIONS & SOFTWARE DOWNLOADS AND WARRANTY REGISTRATION.

WWW.NAKAMICHICARAUDIO.COM

f nakamichi.global anakamichi.caraudio